


VORTICE PUNTO FOUR

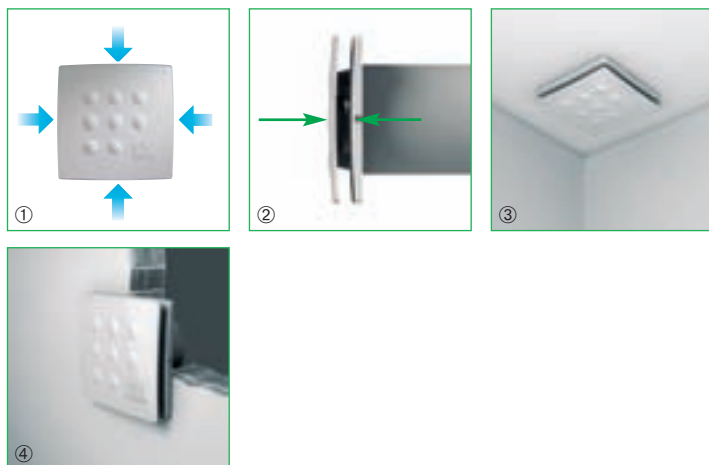

- **Stylish front panel to complement interior design.**
- 6 models available, with or without timer.
- Body made of ABS plastic anti-UV
- Integral backdraught shutter.
- Timer models adjustable between 3 and 20 minutes.
- Standard models can be speed regulated.
- Electric supply 230V/50Hz.


- IPX4 splashproof protection on all models.
- Insulation class: Cl. II.
- Easy to clean and to maintain.
- Safety IMQ Third Party certified.
- Performances and noise emissions certified by IMQ PERFORMANCE Third Party.
- Compliance to standards: please see page 16.

Wiring diagrams shown on page XXXIII.



- ① - ② The air is extracted laterally through an opening concealed beneath the outer cover and drawn from all around the product.
 ③ Ceiling installation.
 ④ Wall installation.

Dimensions (mm)



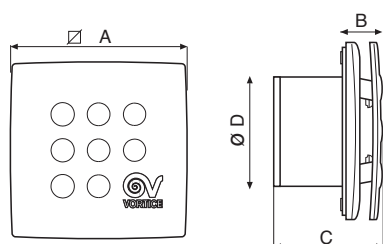


	Ø A	B	C	Ø D
MFO 90/3.5"	158	37	97	92.4
MFO 100/4"	158	37	97	98.4
MFO 120/5"	178	42.3	114	118.9

Product	Code		V ~ 50 Hz	W	A	Rpm	Delivery		P max		Lp dB(A) 3 m	Approvals	kg	Insulation	IP	°C max
		TIMER					m³/h	l/s	mm H₂O	Pa						
 MFO 90/3.5"	11143**	11144**	230-240	14	0.08	2540	65	18	2.5	25	29.6	 	0.50	 cl. II	X4	50
 MFO 100/4"	11145**	11146**	230-240	15	0.09	2400	85	24	3	29	33.1	 	0.52	 cl. II	X4	50
 MFO 120/5"	11147**	11148**	230-240	20	0.12	2240	175	49	5	49	39.1	 	0.70	 cl. II	X4	50

** Not available in UK

Pressure/performance curve

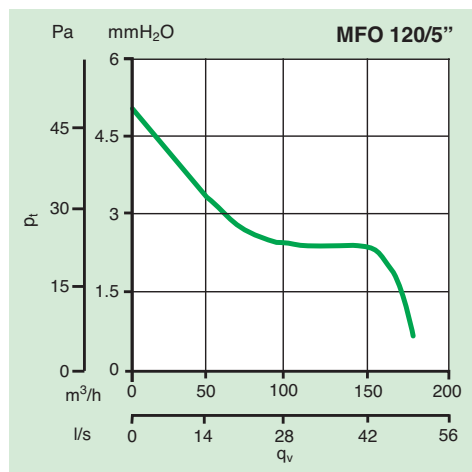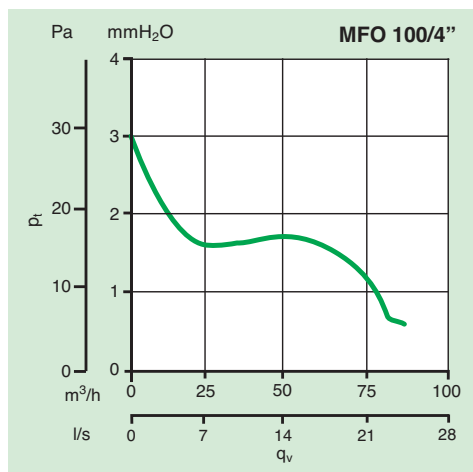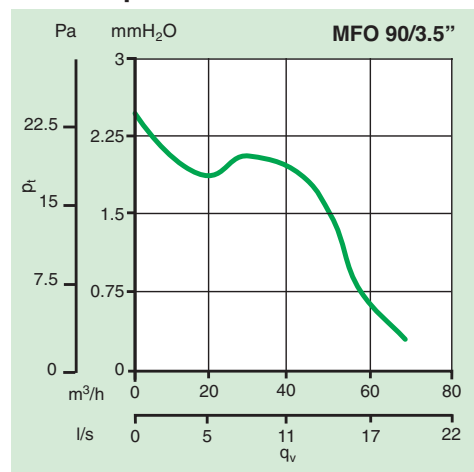

Accessories on request (description and data on page I25)

Model	Code	Product
 C 1.5 electronic speed controller	12966	for standard models
 SCB Kit	22481	for C1.5 (12966)
 Fixed grille (Ø 90-100) 4"	22010	for all products
 Fixed grille (Ø 120-150) 5"	22020	for all products
 Ceiling kit (Ø 90-100)	22162	for all products
 Ceiling kit (Ø 120)	22163	for all products