

# MICRORAPID



## WALL-MOUNTED FAN HEATERS WITH AND WITHOUT TIMER


### Product specifications:

- 8 models with different powers (600/1000/1500/2000 W) with and without weekly digital timer.
- Protected against splashes of water (protection class X4), they can be installed in damp environments.
- The timer versions have a daily/weekly digital programmer.
- Room thermostat to set the temperature.
- Also equipped with a “no frost” function that switches the unit on automatically when the temperature drops under 5 °C.
- The resin parts have high mechanical strength even at high temperatures (V0 self extinguishing plastic).




### KEY FEATURES

- Small dimensions for installations in cramped areas.
- Operational safety, sturdiness, ergonomics and stylish aesthetics.
- Extremely silent (tangential fan drive), suitable for bedroom installation.
- Easy to install: the electric connections can be made with the unit installed on the wall.
- Digital display protected by a lift-up door.
- Stand-by luminous control.





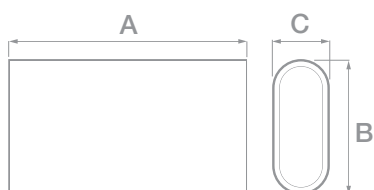





## DIMENSIONS



Models	Code	A	B	C	Kg
MICRORAPID 600 - V0	70602	433	258	109	3.0
MICRORAPID 1000 - V0	70612	503	258	109	3.7
MICRORAPID 1500 - V0	70622	573	258	109	3.8
MICRORAPID 2000 - V0	70632	633	258	109	4.2
MICRORAPID T 600 - V0	70653	433	258	109	3.0
MICRORAPID T 1000 - V0	70661	503	258	109	3.7
MICRORAPID T 1500 - V0	70663	573	258	109	3.8
MICRORAPID T 2000 - V0	70681	633	258	109	4.2

Dimensions (mm)

## TECHNICAL DATA

MODEL	Code	V	Hz	Power Setting W	A	Insulation	IP
MICRORAPID 600 - V0	70602	230	50	300/600	2.6	 cl.I	X4
MICRORAPID 1000 - V0	70612	230	50	500/1000	4.3	 cl.I	X4
MICRORAPID 1500 - V0	70622	230	50	500/1000/1500	6.5	 cl.I	X4
MICRORAPID 2000 - V0	70632	230	50	800/1200/2000	8.7	 cl.I	X4
MICRORAPID T 600 - V0	70653	230	50	300/600	2.6	 cl.I	X4
MICRORAPID T 1000 - V0	70661	230	50	500/1000	4.3	 cl.I	X4
MICRORAPID T 1500 - V0	70663	230	50	500/1000/1500	6.5	 cl.I	X4
MICRORAPID T 2000 - V0	70681	230	50	800/1200/2000	8.7	 cl.I	X4

## APPLICATIONS

